


Wall flashing no. 1



The wall flashing no. 1. is used for the production of professional roof and connections on the roof and facade. It is the connecting plate between the roof surface and the vertical component. The use of the profile ensures controlled water drainage on the roof surfaces and protects the covering from penetrating water. The universally applicable wall flashing is suitable for many roof coverings and gives the roof and facade a visual Rounding.

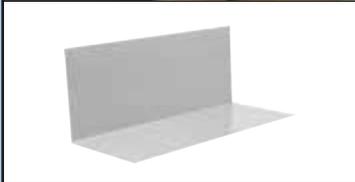


Coverage: Welding web
 Material: Aluminium natural, aluminium coloured, copper and zinc
 Fastening: Spenglers screws and Cardboard nails
 Cut: 200 mm (on request) and 250 mm or special cut according to Sketch (width before mechanical processing)

Article number - Cut 250 mm

	Alu-nature	Alu-anthracite *	Alu-brown *	Alu-white *
1 m	42 600 36 89 0051	42 600 36 89 4691	40 55 66 400 5966	42 600 36 89 4752
2 m	42 600 36 89 0174	42 600 36 89 4707	40 55 66 400 5973	42 600 36 89 4769
	Alu-green *	Alu-brick red *	Alu-sepia brown *	Zinc
1 m	40 55 66 400 5980	42 600 36 89 4738	42 600 36 89 4714	42 600 36 89 4776
2 m	40 55 66 400 5997	42 600 36 89 4745	42 600 36 89 4721	42 600 36 89 4783

Sketch



Connection

Cut in mm	a in mm	b in mm	β in °
200	100	100	95
250	125	125	95



* Colored sheet metal is only coated on one side!

Note for Wall flashing no. 1: Color side inside

If the color side differs, please specify changes!

