


Chimney housing

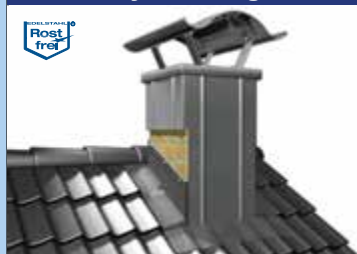

Chimney hoods ensure optimal protection of the chimney head from rain, snow and storms and thus prevent damage to the chimney. They also round off the chimney visually.

All chimney hoods are manufactured according to DIN 18 160 and guarantee you a durable product thanks to their very high corrosion resistance.

The chimney hood is available in a fixed version and a foldable version.



foldable
Version

Material: V2A - stainless steel 1.4301 - 0.8 mm / copper 0.8 mm
Sizes: 500 x 500 mm, 600 x 600 mm, 700 x 700 mm, Special sizes on request

Fastening: Mounting bracket made of stainless steel approx. 200 mm long (4 pieces in a box including fasteners) the following special sizes are possible:
310 mm, 360 mm, 410 mm

Accessories: foldable fastening set made of stainless steel

Article number


500 x 500 mm
(up to chimney head size
400 x 400 mm)
42 600 36 89 2079

600 x 600 mm
(up to chimney head size
500 x 500 mm)
42 600 36 89 2086

700 x 700 mm
(up to chimney head size
600 x 600 mm)
42 600 36 89 2093

Conversion set

42 600 36 89 2109

Chimney hood	Amount		Fastening		Outer dimensions of the chimney head	
	Stainless steel	Copper	fixed	foldable	Length in mm	Width in mm
 <p>Length Width</p>						
<p>- When requesting / ordering, please specify the outer dimension of the chimney head!</p> <p>- The chimney hood is made 50 mm larger all around!</p>						

Attention

- Make sure there is a smooth, horizontal and solid support surface on the chimney head.
- Check the existing chimney head for sufficient load-bearing capacity and check wind influences (if necessary, consult the chimney sweep).
- The dowels supplied are only suitable for solid masonry or concrete slabs.
- There are no prefabricated holes in the chimney hood for individual attachment!
- For the proper and professional attachment of the chimney cover to the chimney head The end user is responsible, not the manufacturer or dealer!